A.I.A. FILE NO. 31-F-2.2.

A-23

EXTERIOR EFFECT LIGHTING *by* kim

32b
K1

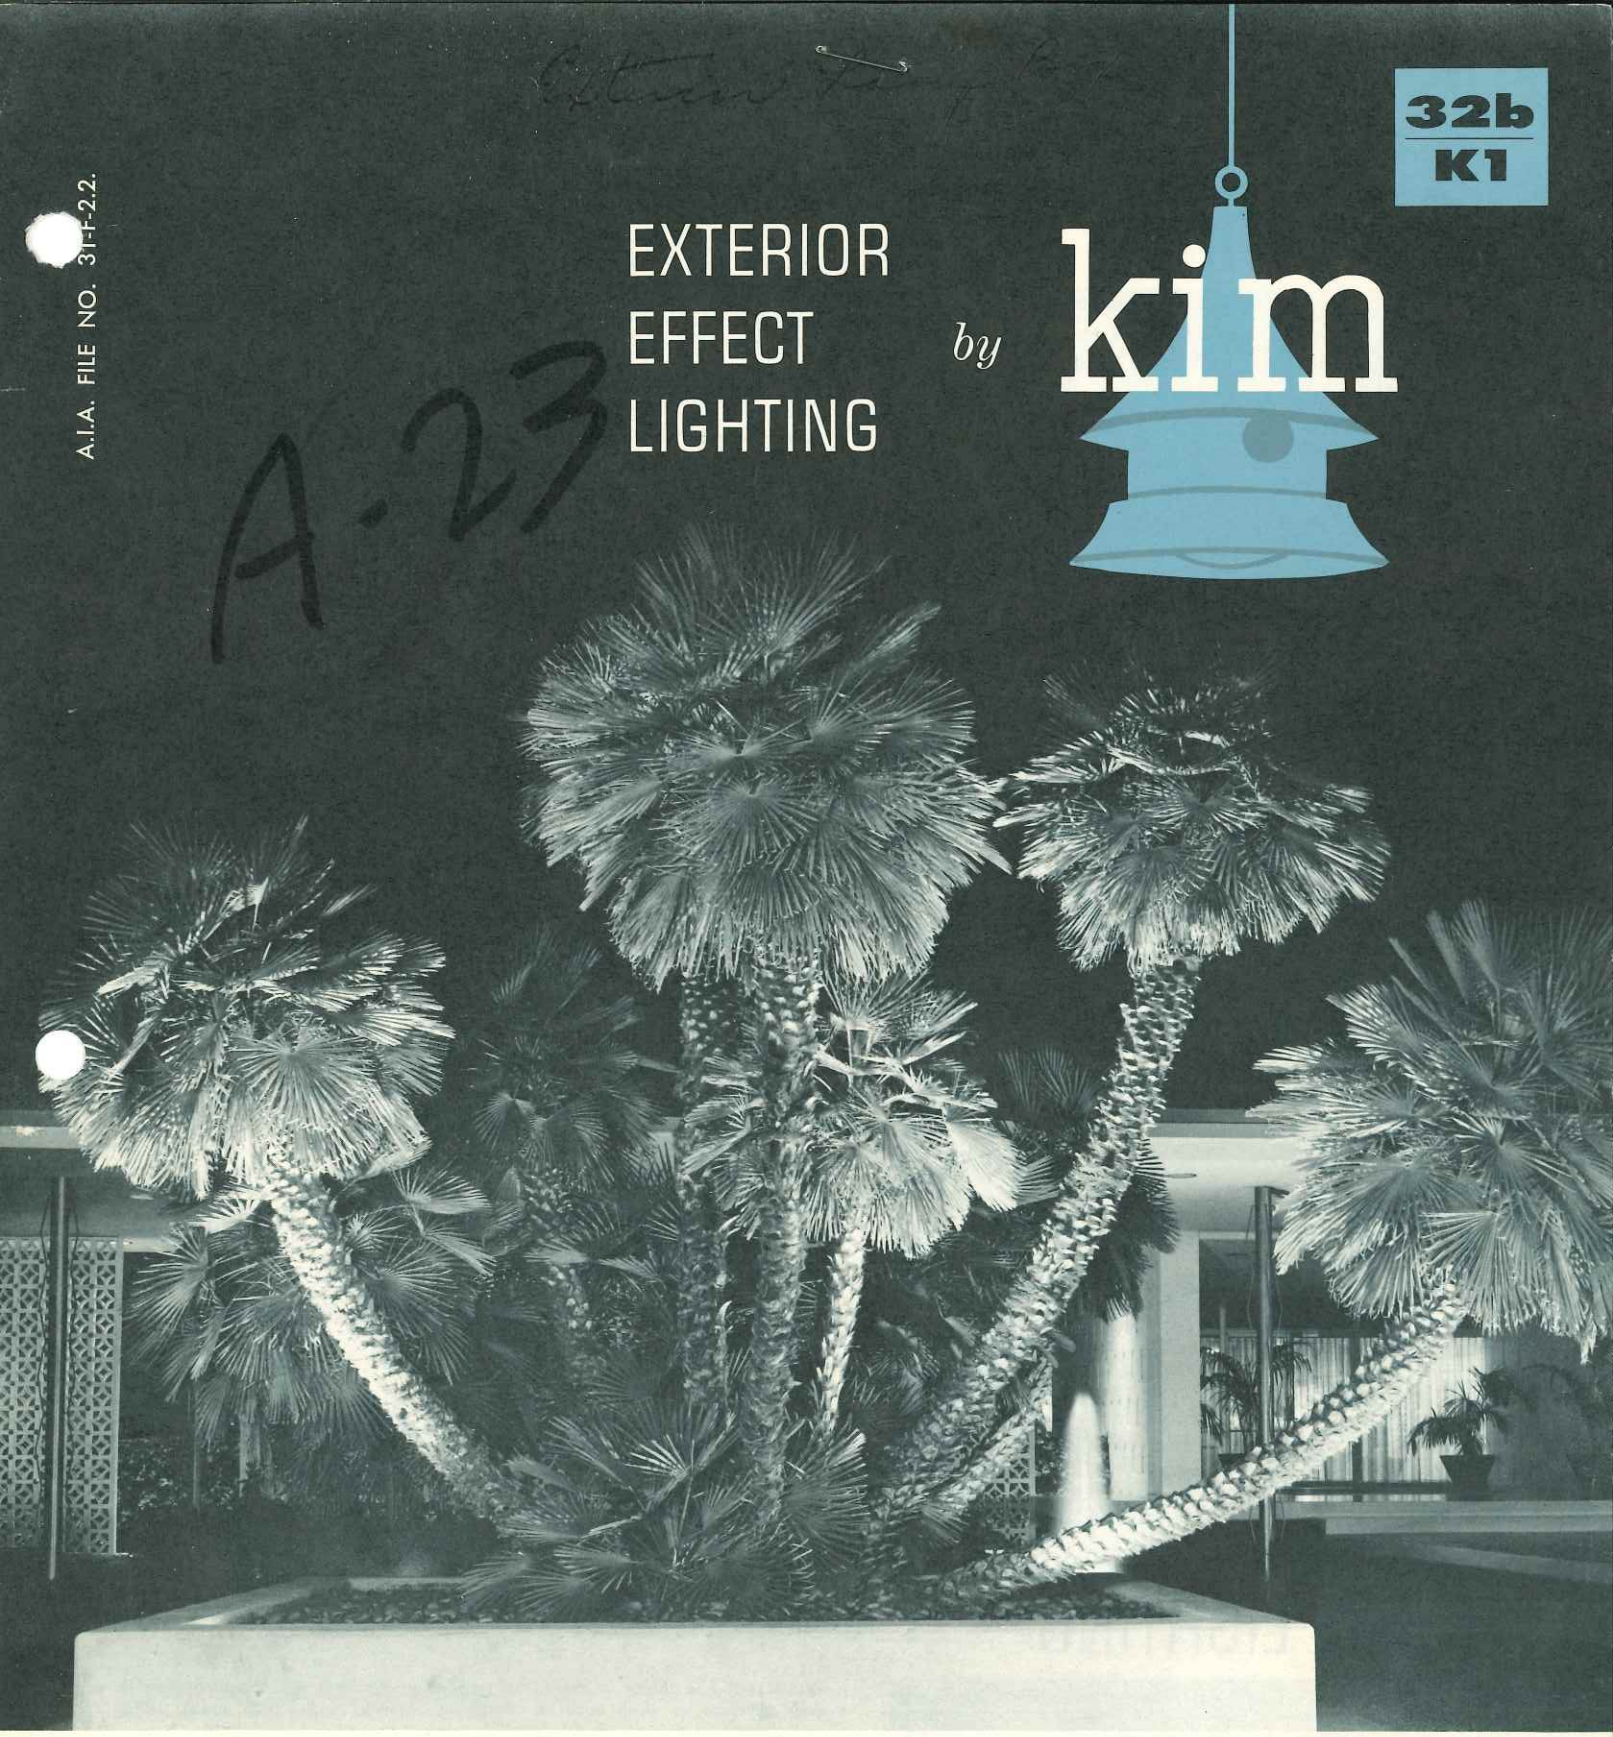

PATENT OFFICE
SEP 3 0 1964
DIVISIONS 81 & 82

The guarantee of every Kim product is backed by one of the oldest and largest manufacturers in the exterior effect lighting and display fountain industry, known the world over as the leader in this specialized field. Write to see Kim's 16 M.M. full sound and color film on Landscape Lighting.

1964

KIM LIGHTING & MANUFACTURING CO., INC. EL MONTE, CALIFORNIA

UP LIGHTING

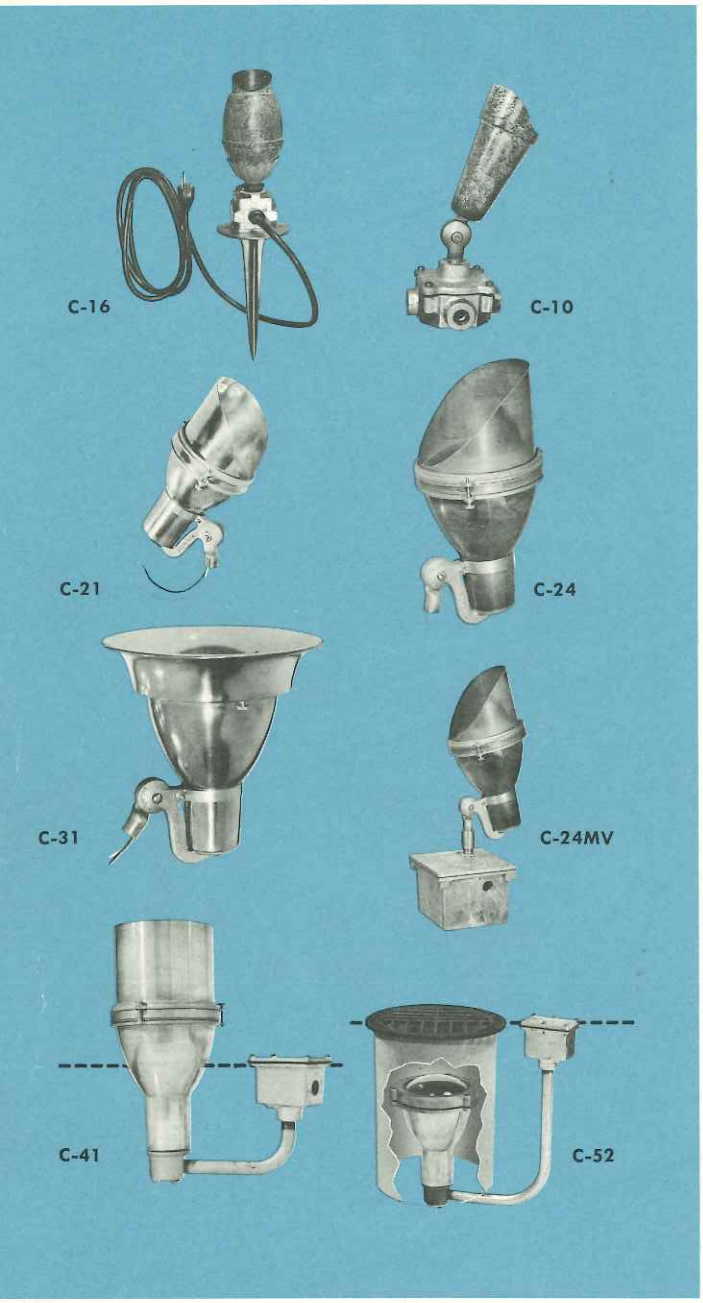

Priced completely wired as shown. Designed free from glare to meet the most meticulous demands. Copper and bronze weatherproof construction. Heat resistant lenses and gaskets.

C-16 MINIATURE BUD RAY

Spear mounted with 6′ 3 wire cord for above ground use. Small size and low wattage is adaptable to the most delicate setting. 25 watt T-8 lamp. Ht.: 14″, Dia.: 3″.

C-10 VERSATILE SWIVEL LIGHT

For above ground mounting—a compact decorative up light for lighting of trees and statuary up to 12′ in height. Finish: Kim verde green. 30 watt R-20 lamp. Ht.: 12″, Dia.: 3″.

C-21 HALF SHIELD SWIVEL LIGHT

For above ground mounting. Shield eliminates glare. Fully adjustable swivel has ½″ thread. Uses 75 watt R-30 lamp. Ht.: 10″, Dia.: 5″. For portable use order with J-25 spear.

C-24 HALF SHIELD SWIVEL LIGHT

For above ground mounting. Fully adjustable swivel has ½″ thread. Uses 150 watt R-40 lamp. Ht.: 13″, Dia.: 6″. For portable use order with J-25 spear.

C-31 WIDE SPREAD SWIVEL LIGHT

For mounting above eye level. Adjustable swivel has ½″ thread. Uses 150 watt R-40 lamp. Ht.: 10″, Dia.: 8¾″.

C-24 M.V. MERCURY VAPOR HALF SHIELD LIGHT

For above ground mounting. Same as C-24 except furnished with transformer in watertight junction box. Uses 100 watt M.V. lamp. Ht.: 18″, Dia.: 6¾″.

C-41 SEMI-RECESSED UP-LIGHT

Installed unit is partially buried. Uses 150 watt R-40 lamp. Ht.: 14″, Dia.: 6″.

C-42 M.V. MERCURY VAPOR (not shown)

Like C-41 except with transformer in larger junction box. Uses 100 watt M.V. lamp.

C-52 WELL LIGHT

For flush mounting. Safety grille sets flush with ground level. Transite tile 9″ x 12″. Uses 150 watt R-40 lamp.

C-52 M.V. MERCURY VAPOR (not shown)

Like C-52 except with transformer in larger junction box. Uses 100 watt M.V. lamp.

DOWN LIGHTING

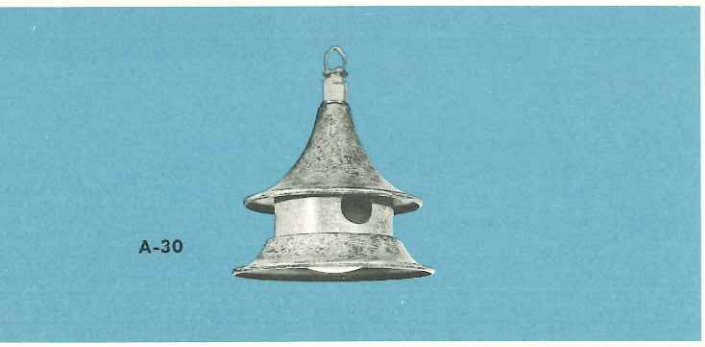

Styled with the future in mind, the clean pleasing lines are complimentary to any structure or area such as shopping centers, malls, pool areas, large entry ways or private residences.

WREN HOUSE LIGHTS for suspension mounting from tree limbs, patios, or pipe support. Light spreads softly downward through a diffused illusion lens. Constructed of copper and bronze with Kim's verde finish. Fixtures illuminate a 2′ ground area for each foot of mounted height.

A-30 WREN HOUSE FLEDGLING
For cord mounting. Max. watt.: 100. Ht.: 10½″, Dia.: 9″.

A-31 Same as A-30 except with a ½″ capped elbow for conduit mounting.

A-40 WREN HOUSE LIGHT
For cord connection. Max. watt.: 150. Ht.: 15″, Diam.: 12½″.

A-41 Same as A-40 except with a ½″ capped elbow for conduit mounting.

SPREAD LIGHTING

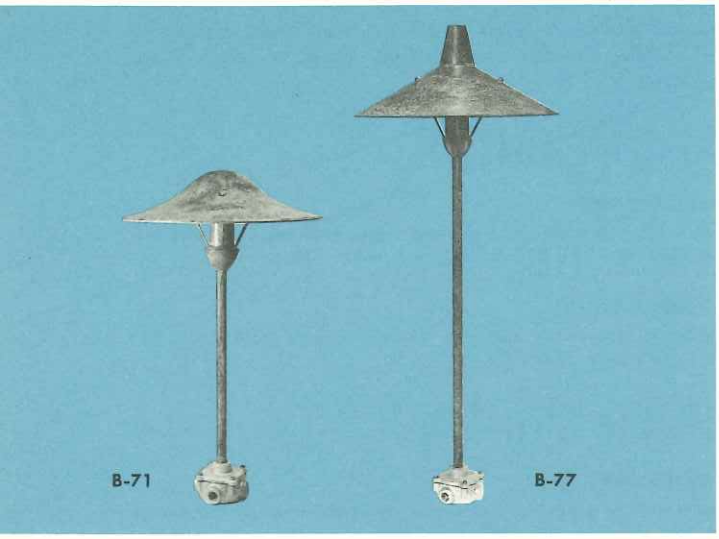

Designed for those who desire good lighting characteristics without sacrificing the esthetic values. Kim has developed their own exclusive "Kim Verde Green" acid etched verde finish which provides a lifetime mottled green patina surface on copper and bronze.

***B-71 TERRACE LIGHT**

For low level lighting with maximum light spread free from glare. Copper and bronze weatherproof fixture, wired with underground junction box. Finish: Kim verde green. Lights a 20′ dia. Max. watt.: 100, Ht., 27″, Dia.: 16″.

***B-73 TERRACE LIGHT (not shown)**
Same as B-77 except one foot shorter. Lights a 20′ dia. area.

***B-75 TERRACE LIGHT (not shown)**
Same as B-71 except stands 39″ high. Lights a 32′ dia. area.

***B-77 TERRACE LIGHT**

Copper and bronze weatherproof construction, wired with junction box. Finish: Kim verde green. Lights a 32′ dia. Max. watt.: 100, Ht.: 42″, Dia.: 18″.

AREA LIGHTING

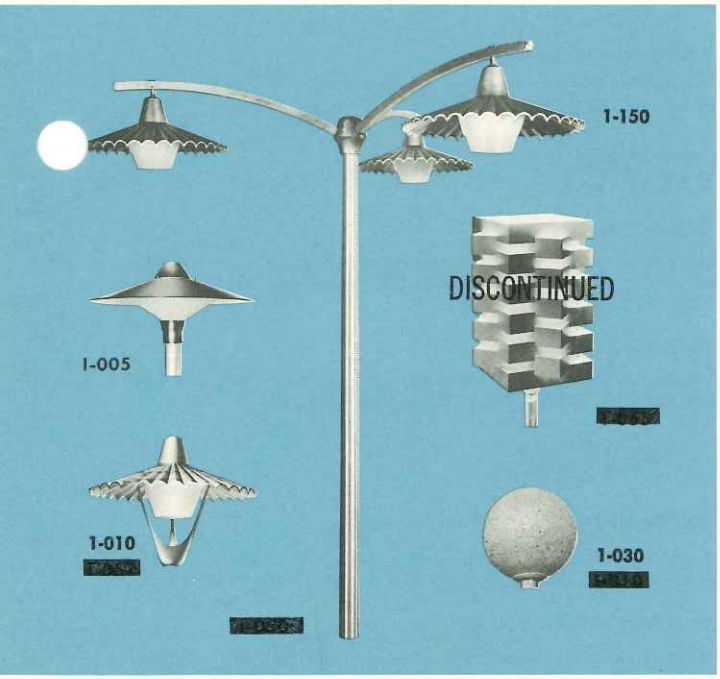

Developed for use in malls, parking areas where good area lighting and aesthetics are desired. Note clean design of center post and arms, and excellent balance of unit. Kim has many fixtures listed in their full catalogue for area lighting.

1-005

For 2½″ post mounting, all aluminum construction. Acrylic diffusing lens. Uses 300 watt incandescent or 175 watt Mercury Vapor. Ht.: 14″, Dia.: 30″.

[redacted]

The cuboid fixture is a decorative fixture with the light output being 35% less than Kim's standard fixtures. Unit emits a soft glow and gives many interesting patterns. Uses 300 watt incandescent lamp. May be suspended or mounted on 2½″ pole.

DISCONTINUED

[redacted] **1-010**

All cast aluminum construction, including sculptured reflector. Acrylic diffuser. No exposed nuts, bolts, or support rods. Ht.: 16″, Dia.: 26″. Slips, 2½″ pipe, 300 watt.

[redacted] **1-030**

A fiberglas globe with embedments of capa shell. Gives a most pleasing effect by day and night. Fixtures available in plain fiberglas, acrylics and regular glass. Globe, 16″, 300 watt. Slips, 2½″ pipe.

[redacted] **1-150**
1-150
Three [redacted] all cast aluminum fixtures mounted on a 2-004 triple arm and a PTB-10 post demonstrates one of many combinations available. Arms are available in 1, 2, or 3 arms. Excellent for malls and parking areas.

BORDER LIGHTING

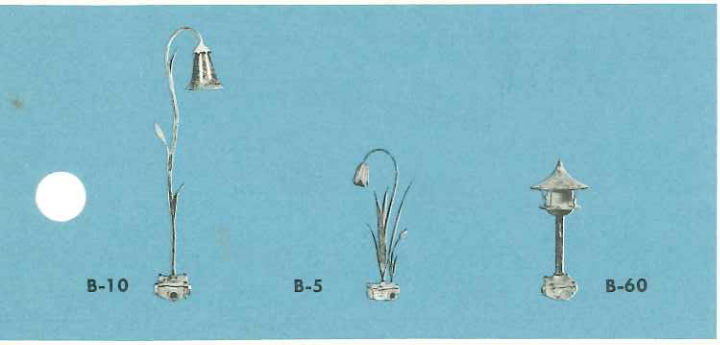

Copper and bronze weatherproof construction. Kim verde green finish. Priced completely wired as shown. These fixtures blend gracefully with their surroundings. For lighting steps, pathways, and small planting areas.

***B-10 JUNIOR BLUE BELL**
Lights a 14′ diameter. Max. watt.: 40, Ht.: 34″, Dia.: 5″.

***B-20 LILY BELL (not shown)**
Same as B-10 with longer leaves and tiny bud.

***B-5 TULIP**
For a single step or delicate setting. Lights a 5′ diameter. 6 watt lamp. Ht.: 19½″, Dia.: 2¼″.

***B-60 BORDER LIGHT**
Illuminates a 16′ diameter. 60 watt A-19 lamp. Ht.: 19½″, Dia.: 8″.

*For portable use, specify J-25 spear with 6′ 3 wire cord at no additional cost.

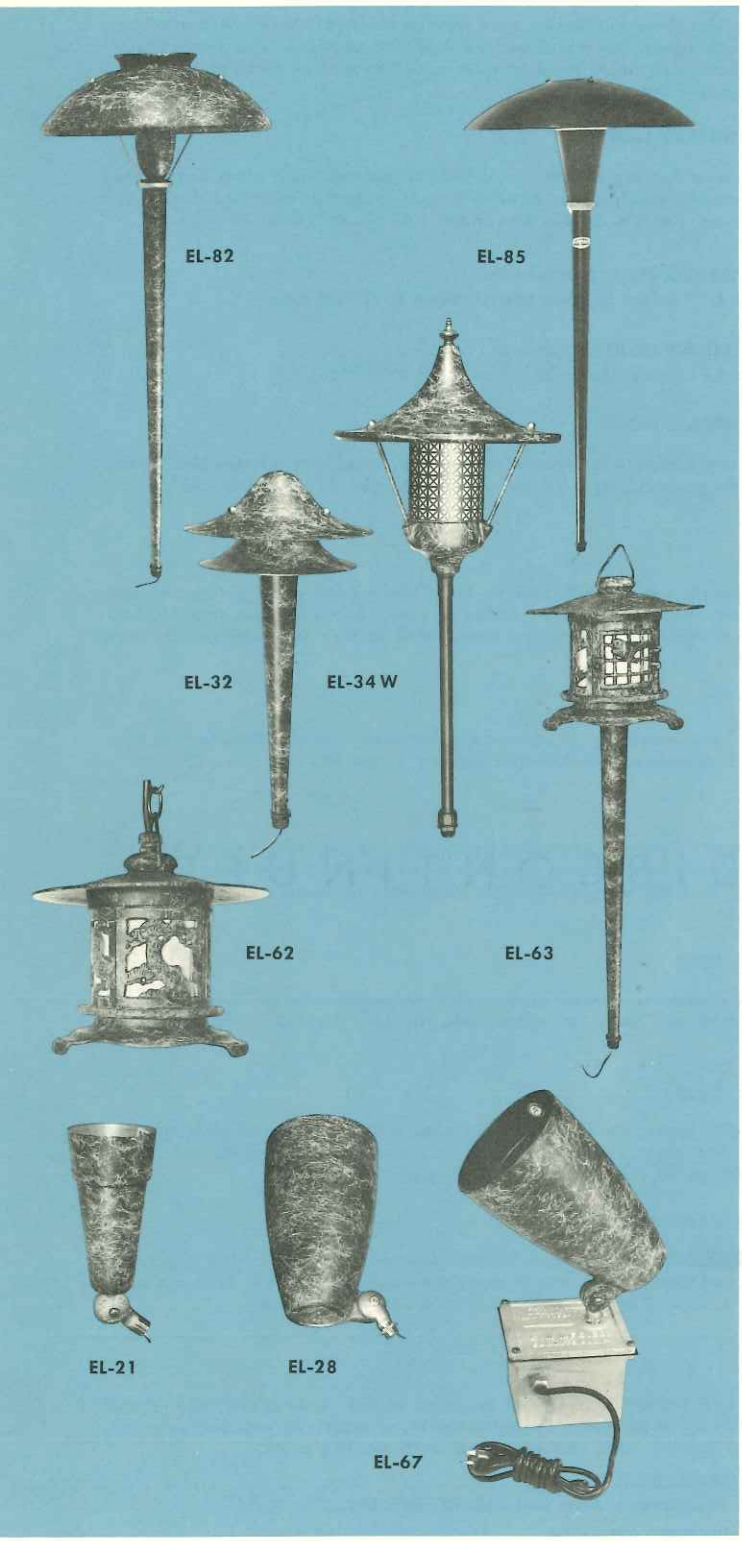

A medium priced line made of aluminum and steel, treated to withstand the elements. Finish: variegated green and black baked enamel. All El Dorado fixtures are wired and priced less junction box or spear and cord mounting.

SPREAD LIGHTING

EL-82 TERRACE LIGHT

For wide spread illumination of exposed areas. Produces a 30′ diameter circle of light. Ht.: 37″, Dia.: 15½″, Max. watt.: 100.

EL-85 TERRACE LIGHT

Illuminates an area 40′ in diameter. Handsome matte black finish. Ht.: 38″, Dia.: 18″. Max. watt: 100.

BORDER LIGHTING

EL-32 GUIDE LIGHT

For illumination of pathways, entryways, etc. Light spread approximate 10′ dia. Ht.: 16″, Dia.: 8″. 40W. A-19 lamp.

EL-34 ORIENTAL GUIDE LIGHT (not shown).

Same as EL-34W except without stem and unwired. For direct conduit mounting.

EL-34W ORIENTAL GUIDE LIGHT

An enchanting addition to any type of landscaping. Clear glass globe shielded by perf. cylinder. Ht.: 24″, Dia.: 10″, Max. watt.: 60.

LANTERNS

EL-62 ORIENTAL LANTERN

For suspension mounting. Diffusion lens in bottom permits illumination of area beneath fixture. Complete with 18″ chain and 15′ cord. Ht.: 8½″, Dia. 10½″, Max. watt.: 60.

EL-63 ORIENTAL LANTERN

Beautifully designed in authentic oriental styling. Built-in fiberglas shield eliminates glare. Ht.: 29½″, Dia.: 10½″, Max. watt.: 60.

UP LIGHTING

EL-21 SWIVEL LIGHT

Above ground mounted, for lighting subjects up to 10′ in height. Adjustable swivel has ½″ thread. Ht.: 12″, Dia.: 3¼″. 30 or 50 watt R-20 lamp.

EL-28 HI-INTENSITY SWIVEL LIGHT

Above ground mounted. Heavy cast aluminum unit with 30° shielding for 150W. Par-38 lamp. Adjustable swivel threaded ½″. Ht.: 10½″, Dia.: 6¼″.

EL-67 M.V. MERCURY VAPOR

For above ground mounting. Heavy cast aluminum unit with heat resistant lens, transformer in weatherproof junction box, and 6′ 3 wire cord. Ht.: 16″, Dia.: 6¼″. Uses 100W. M.V. lamp.

PATENT OFFICE
AUG 30 1954
DIVISIONS 81 & 82

KIM LIGHTING & MANUFACTURING CO., INC.

1467 North Lidcombe Avenue • El Monte, Calif. • Area Code 213 • Phone 443-1394

Kim agents cover 49 states, District of Columbia, Canada, Mexico and Puerto Rico. For one nearest you, see Kim catalog 39e/K1 in the Architectural Files, or contact the company at El Monte, California.